

Product Name: ZX000x0308R 50 Ohms RG405 0.086" DC to 20GHz Semi-Flexible RF High Speed SMA to right angle SMP Jack coax cable assembly

Product Description: DC to 20GHz RF High Speed 50 Ohms 24 AWG (2.2mm) 0.086" diameter RG405 semi-flexible SMA to right angle SMP coax cable assembly.

Cable length: 8 inches (20cm)

Insertion loss: < 0.2dB @ 10GHz

SMA & SMP connectors mates with counterpart, please see ordering information.

Application: General RF high speed coax cable assembly requiring absolute minimum insertion loss. DC-20GHz CSI, DSI, HDMI, DP USB 3.1 and embedded signal measurements


Mates with : SMA connector mates with standard SMA connector, please see ordering information. SMP mates with any standard SMA Plug.

Coax Cable information:



Type: RG405
 Material: Silver plated copper
 Dielectric: PTFE 1.68
 Outer Conductor: Blue coating over Spiral Wrapped Silver Plated Copper Tape + Silver Plated Copper Barid
 Attenuation: ([B/m]: 0.2dB [< 3.4dB/meter @ 18GHz]
 Impedance: 50 Ohms
 Dielectric Constant (dk): 2.1
 Current rating: 5A
 Capacitance: 95pF/meter
 Minimum bend radius (MBR): single bend: 6mm multiple bends 25mm
 Temperature rating: -65°C / +165°C
 Flammability: UL 94 V-0
 Flame resistance: compliance with IEC 60332-3-24

SMA / SMP Connector:

Type: 35u" GOLD PLATED AT pin BRASS with Nickel finish 5u" on RING
 Insulator: PTFE

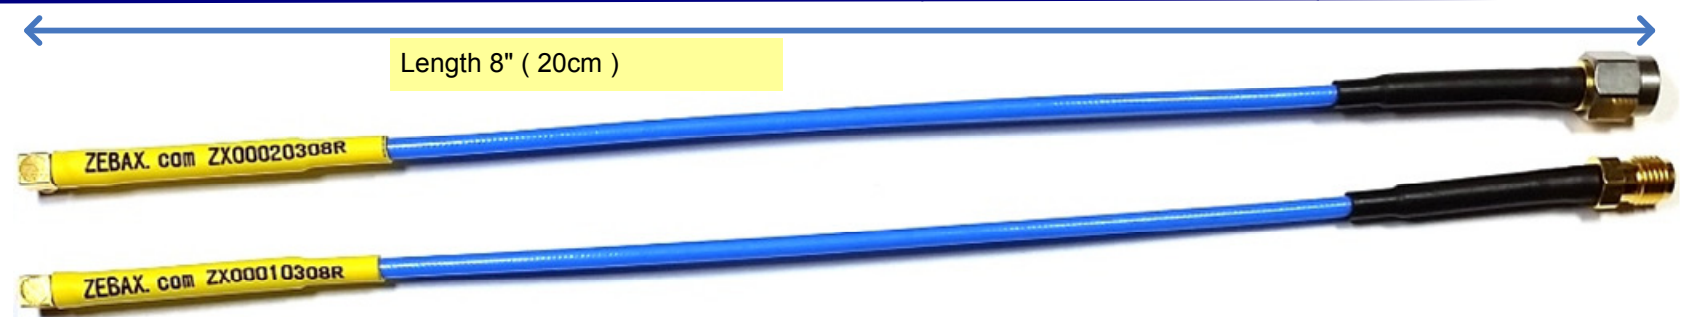

Semi-flexible cable – maintains any form due to its Silver Plated Copper Braid metal shielding.

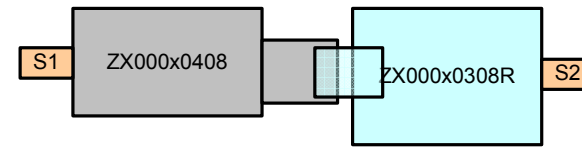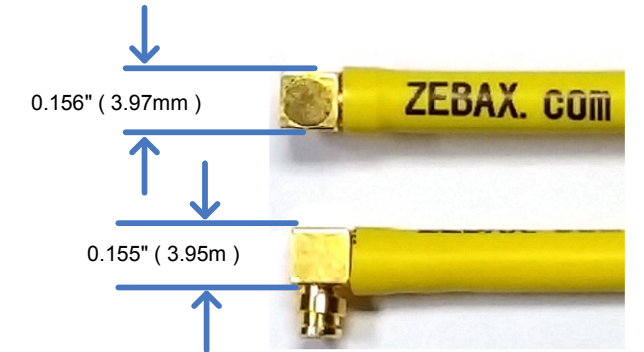




Test network : ZX000x0408 Plug and ZX000x0308R via the SMP connectors
 S1 in → S2 Out

S-Parameter, Insertion loss: ZX000x0308R exhibits unprecedented low insertion loss. The following data is obtained from actual ZX000x0308R RF DC to 20GHz SMA cable assembly using network analyzer. The S-Parameter is obtained using ZX000x0408-J and ZX00010308R combination of Plug and Socket (Receptacle) SMP cable assemblies.

S-Parameter files: Please download the S-Parameter files, .s2p files for the ZX00010308R networks from here :



ZX00010308R DC to 20GHz SMA to right angle SMP RF High Speed coax cable assembly: [ZX000x0308R-S-Parameter](#)

Test reports using network analyzer for 8" SMA to right angle SMP RF high speed RG405 coax cable assembly, ZX00010308R.

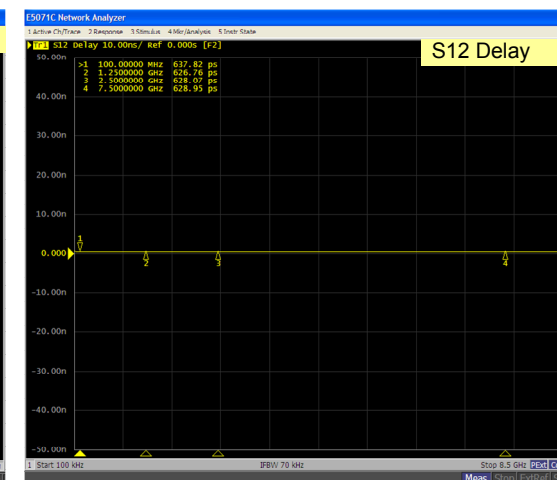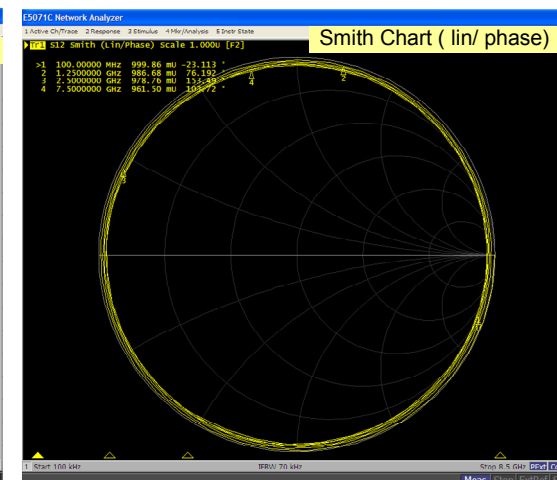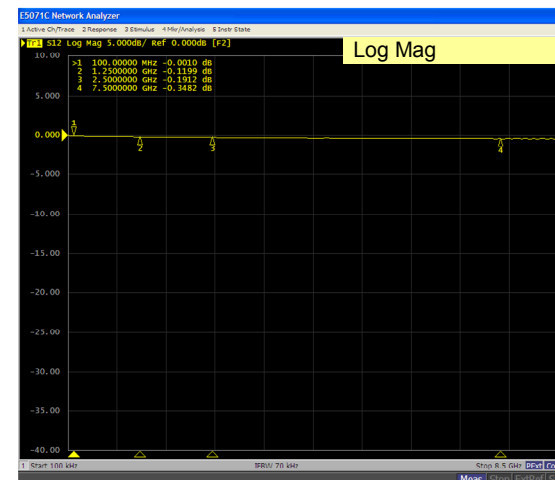

Ordering INFO:

Part Number
 ZX00020308R options

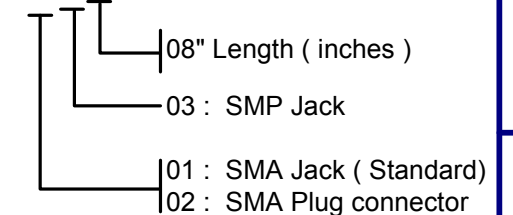

Note
 ALL ZEBAX products are RoHS compliant and Lead Free unless otherwise indicated.

Notice
 ALL ZEBAX TECHNOLOGIES DESIGN SPECIFICATIONS, DRAWINGS, PUBLICATIONS, AND OTHER DOCUMENTS (TOGETHER AND SEPARATELY, "MATERIALS") ARE BEING PROVIDED "AS IS." ZEBAX MAKES NO WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE WITH RESPECT TO THE MATERIALS, AND EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF NO INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE.

Information furnished is believed to be accurate and reliable. However, Zebax Technologies assumes no responsibility for the consequences of use of such information or for any infringement of patents or other rights of third parties that may result from its use. Specifications mentioned in this publication are subject to change without notice. This publication replaces all other information previously supplied. Zebax Technologies products are not authorized as in life support devices or systems.

ZEBAX TECHNOLOGIES
 SANTA CRUZ, CA U.S.A (8 3 1) 2 2 2 - 0 7 1 7
 WWW.ZEBAX.COM

SPECIFIED DIMENSIONS ARE INCHES (MM). ROHS COMPLIANT	ASSEMBLY DRAWING	
	ITEM: ZX000x0308R	
DESCRIPTION: DC to 20GHz RF High Speed SMA to SMP Jack Right Angle coax cable assembly		
CHECKED: M. MARINA	DRAWN: SLAVIK	REVISION: 1.0
		SHEET: 1 OF 1