

Product Name: ZX141-QTS-QSS-050 Samtec Breakout Adapter

Product Description: 50pins per row x 2rows → 100 pins Samtec breakout adapter supporting Samtec 0.635mm (0.025") pitch Q Strip high speed ground plane Terminal strip connector series. All Samtec QTS QSS 050 connector pins are accessible via onboard 0.1" pitch header. ZX141-QTS-QSS-050 mates with any type of Samtec QTS and QSS 050 connectors.

- 1- All Samtec QTS QSS 050 connector pins are accessible via onboard 0.1" (2.54mm) pitch header.
- 2- All traces are designed 50 Ohms impedance controlled.
- 3- Four, 4, layers PCB design, inner layers are GND planes with direct connection to QTS and QSS ground blades.
- 4- Accessible GND test point, The test point is connected to module's GND planes (integral metal plane - GND blade)
- 5- Mates with any Samtec QTS and QSS height and formfactor connector series such as -DP, -RA, -EM configurations.
- 6- Ease of interface with single ended and differential scope probes.
- 7- Ideal test solution for interfacing to evaluation board or host for test and measurements.
- 8- Fully compatible with Single Ended , SE, and Differential Pair, DP, Samtec connector QSS connector series as well as cable assemblies; SQCD .
- 9- Improved signal integrity and crosstalk.
- 10 – Easy design modification & interface utilizing ZX100ACC-SS wire assembly – offered at 3", 6", 9" and 12" lengths

Electrical: Insertion loss > -1dB @2GHz
 Trace impedance: 50 Ω
 Operating Temperature: -55°C to +125°C
 Current per QTS QSS pin: 1.8A (max.)
 Ground Plane Current: 46A (23 A per bank) – max.

Application: Bringup, testing, emulation, development, modular design evaluations, manufacturing test & measurement

Mates with : Samtec QSS -050 QTS-050 connectors, SQCD cable assembly, and any 2 banks of QTS-075 or QTS-100 connectors. Compatible with UMPT/UMPS for flexible two-piece power/signal solutions

Pitch: 0.635mm (0.025") High Speed connector

Headers: 0.1" (2.54mm) center, 0.025" (0.64mm) SQ with 0.23" (5.6mm) post height

Header pin configuration: Table below exhibits the header pin configuration. The listed number is Samtec QSS connector pin number

ZX141-QTS-QSS-050 pin configuration															
TOP	QSS	J6													
BOTTOM															
Layer															
Top	Headers	J3	7	15	23	31	39	47	55	63	71	79	87	95	GND
			5	13	21	29	37	45	53	61	69	77	85	93	GND
		J2	3	11	19	27	35	43	51	59	67	75	83	91	99
			1	9	17	25	33	41	49	57	65	73	81	89	97
Bottom	Headers	J5	8	16	24	32	40	48	56	64	72	80	88	96	GND
			6	14	22	30	38	46	54	62	70	78	86	94	GND
		J4	4	12	20	28	36	44	52	60	68	76	84	92	100
			2	10	18	26	34	42	50	58	66	74	82	90	98
TOP	QTS	J1													
BOTTOM															
Pin 1 of QSS is connected to Pin 1 of QTS															

Notice

ALL ZEBAX TECHNOLOGIES DESIGN SPECIFICATIONS, DRAWINGS, PUBLICATIONS, AND OTHER DOCUMENTS (TOGETHER AND SEPARATELY, "MATERIALS") ARE BEING PROVIDED "AS IS." ZEBAX MAKES NO WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE WITH RESPECT TO THE MATERIALS, AND EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF NO INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE.

Information furnished is believed to be accurate and reliable. However, Zebax Technologies assumes no responsibility for the consequences of use of such information or for any infringement of patents or other rights of third parties that may result from its use. Specifications mentioned in this publication are subject to change without notice. This publication replaces all other information previously supplied. Zebax Technologies products are not authorized as in life support devices or systems.



ZX141-QTS-QSS-050 package includes:


Part number	Quantity	Description
ZX141-QTS-QSS-050	1	Breakout Adapter
ZX100ACC-SS	0	28AWG pin socket to pin socket wire assembly

Compliance:

- ISO2001 certified
 - RoHs - Lead Free
 - EU RoHS2
 - UL E111594 document
 - ELV- Vehicle Directive (Directive 2000/EC)
 - European Union Directive (203/11/EC)
 - Halogen Free per IEC-61249-2.21 : 2003
 - RoHs Directive 2011/65/EU
 - WEEE Directive (2012/12/EU)
- Certificate of Compliance for Radioactive substances
 Certificate of Compliance for Asbestos
 Certificate of Compliance for Ozone Depleting Substances, ODS
 Certificate REACH SVHC
 Certificate of Compliance RoHS_EN_CoC

2.44" (62mm)

2.0" (51.0mm)

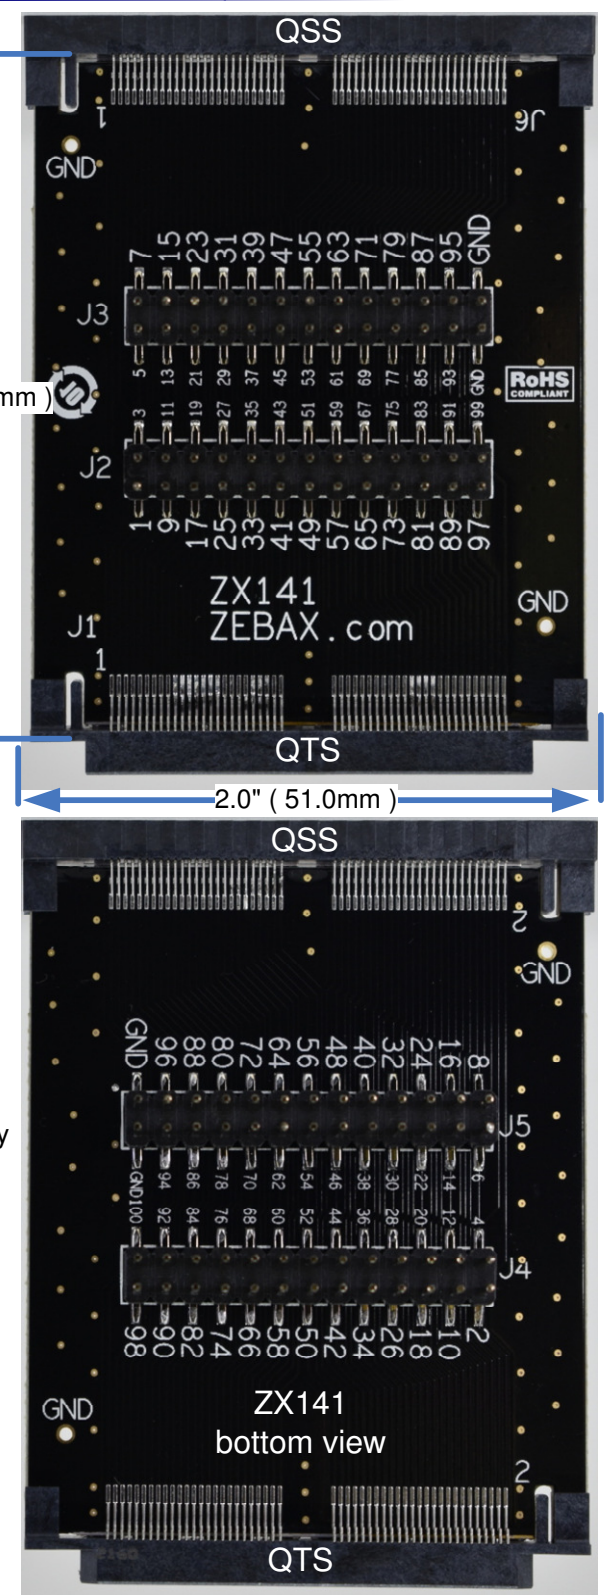

Note: ALL ZEBAX products are RoHS compliant and Lead Free unless otherwise indicated.

ZEBAX TECHNOLOGIES		
SANTA CRUZ, CA U.S.A (831) 2 2 2 – 0717		
WWW.ZEBAX.COM		
SPECIFIED DIMENSIONS ARE INCHES (MM). ROHS COMPLIANT	ASSEMBLY DRAWING	
	ITEM: ZX141-QTS-QSS-050	
DESCRIPTION: Samtec breakout adapter QTS QSS 050		
CHECKED: M. MARINA	DRAWN: MATTHEW	REVISION: 1.0
		SHEET: 1 OF 1